# M200 Series - Data Sheet



# Micro Centrifugal Liquid Pump Range

### **Overview :** Micro, Low Pressure, High Flow, Liquid Pump Range

The M200 series range of pumps are constructed from precision CNC machined aluminium alloy with stainless steel tubing connectors. The M200 range is fitted with Viton seals as standard. Alternative seal materials and optional wetted part coatings and materials are also available enabling this pump range to resist most chemicals and solvents. The pump uses efficient push fit connectors designed for 3.2mm flexible tubing. A 220mm electrical fly-lead is fitted as standard.

### **Pump Variants**



M200S - Standard pump suitable for most applications



M200S-180 - Standard pump for inline flow connection

## **Typical Applications**

- Medical devices
- Fuel Cells
- Battery and Solar Powered Systems
- Cooling Systems
- Low Pressure Fuel Pump
- Lubrication systems



M200P2 and P4 - Super eficient pumps for fixed 6V supply



M200S-SUB - Pump for submersion in pumping medium

### Features


- CNC aluminum alloy construction
- Quiet pulseless smooth flow
- Small size only 29 x 16 x 16 mm
- Weight 11 13g
- Free flow up to 700ml per minute (water)
- Power by Solar supply, PSU or batteries
- Wide range of chemical resistance


TCS Micropumps ltd www.micropumps.co.uk Email sales@micropumps.co.uk Tel +44 (0) 1795 539 655

Document Ref No. DSO3 Page 1 Rev 5.





# M200 Series - Data Sheet







Connectors to suit 3.2mm tubing





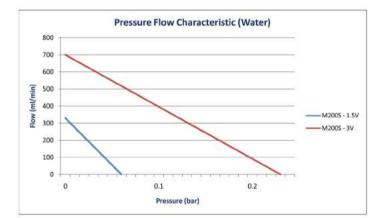

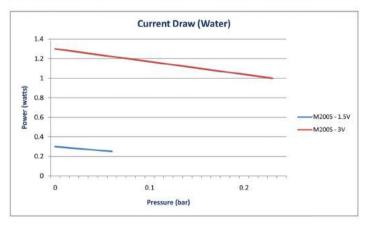

### Materials

#### Wetted Parts

- Anodised 6000 Series Aluminium
- 316 Stainless Steel
- Viton or EPDM
- Polyacetal

#### Other

Materials typical to 3 pole DC motor

### Performance Data

x x29mm

- Weight 11-13 g
- Operating Temp -20 to 100 deg C
- Smooth Pulseless Flow
- IP Rating Standard pumps IP45
  Waterproof pumps IP67
- Noise Levels <1dB</li>
  Measured at a distance of 1m with a 50dB ambient noise level
- MTBF Stock Pumps
  Special Variants available to order
  >10,000hrs

Variant	Input	Power	Flow	Pressure
	(V)	(W)	(ml/min)	(mBar)
M2005	1.5	0.3	330	60
	3	1.3	700	230

TCS Micropumps Itd www.micropumps.co.uk Tel +44 (0) 1795 539 655

Document Ref No. DSO3 Page 2 Rev 5. mail sales@micropumps.co.uk Tel +44 (0) 179